


# LL-SUPERTHIN - Linear LED



Lamp description  
**STRIP LED**


SMD 2835 | PCB 4 mm | 8,8 W/m

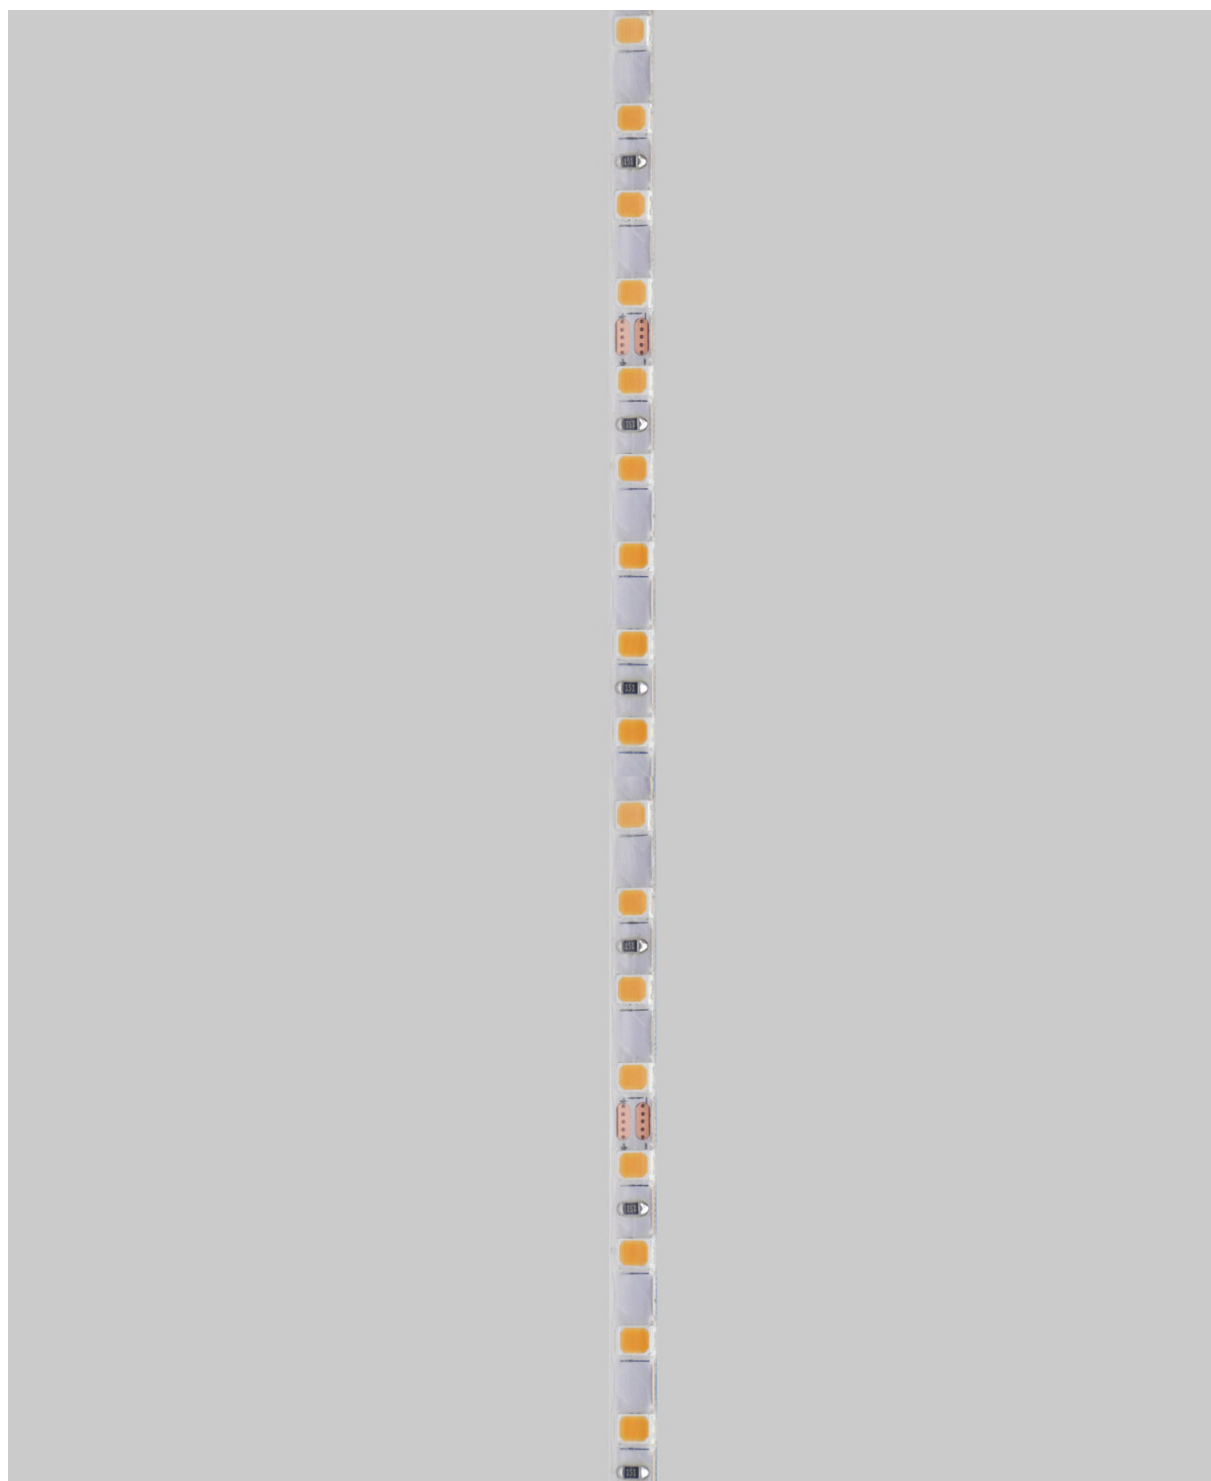

# LL-SUPERTHIN

LED Strip | specifications

SMD 2835 | PCB 4 mm | 8,8 W/m



## SPECIFICATIONS

**Led chip:** SMD 2835

**Power:** 8,8 W/m

**Luminous Flux 3000K :** 960 lm/m

**CRI >90**

**CCT:** 2700K – 3000K – 4000K – 5000K

**Beam angle:** 120°

**Driver:** External, not included

**Input LED Strip:** DC 24 V

**Operating Temperature:** -20° ÷ + 40° C

**IP grade**

IP20 (PCB 4 mm) – IP65 (PCB 5 mm)

**Insulation class:** III

**Roll length:** 5000 mm


**Dimension:** 4 x 1.5 x 5000 mm

**Cut length:** 50 mm

**LED chip quantity:** 600 chip/roll – 120 chip/m

**Installation:** By adhesive on the back

**Important:** A dissipating metal support is recommended

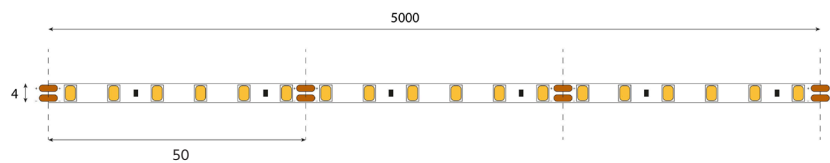

## CERTIFICATIONS



## PRODUCT CODE

**LL-SUPERTHIN-8,8-WW-20-24**

X Power: 8,8

X1 CCT : SW / WW / NW / PW

X2 IP Grade: 20 – 65

X3 INPUT: 24

